



SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C





Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

1225 11XX X N XX Z XXX X 01

No. of Pins Per Row 01~40P
 Insulator Option A=BK-PBT C=BK-PA6T D=BK-PA6 E=BK-PA9T F=BK-LCP
 Material Option G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold G6:10U" Gold G7:15U" Gold G8:Gold Flash/Tin
 Contact Plating G0:Gold Flash
 Pin Length A=Troy B=PE Bog C=Tube D=Tube+Cap E=Reel+Cap F=Reel+Myfor
 Packing M=Reel+Myfor

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

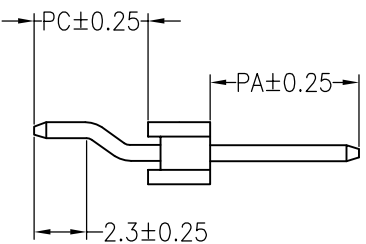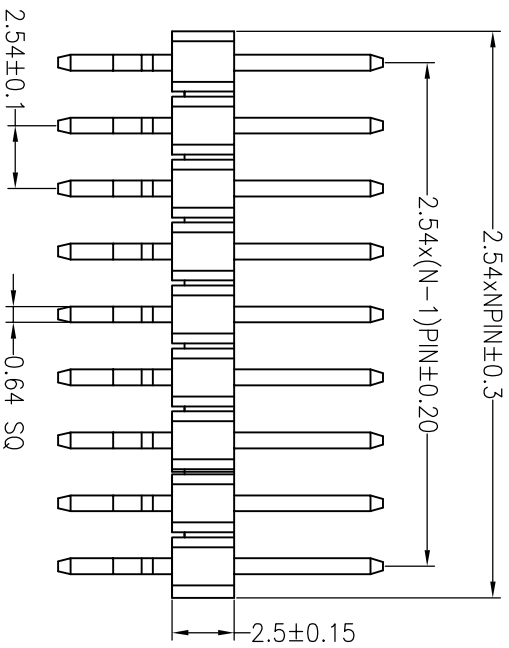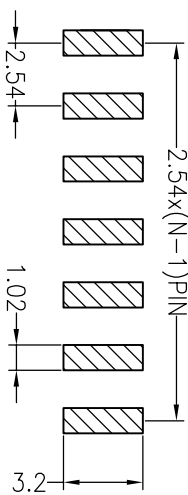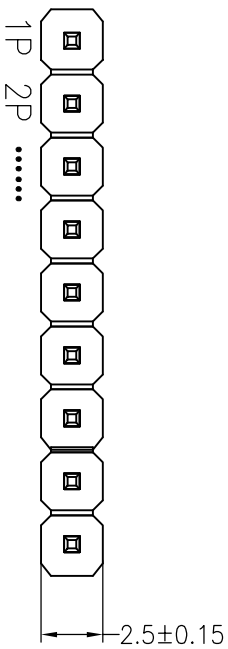

Dimension antitheses list				
ITEM	PC	PA	L	
Standard	4.80	6.00	13.50	

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.
A0	2019.09.20	NEW DRAWING		X.XX ±0.30 X.XX ±0.20 X.XXX ±0.10	YUuSheng 19.09.20	mm	A4	122511XXXXXXZXXXX01
1				Angle ±3°	APPROVE		1/1	2.54PH H2.5mm Dual Row 贴片

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.
1				DIM TOL	APPROVE		PROJ.	