



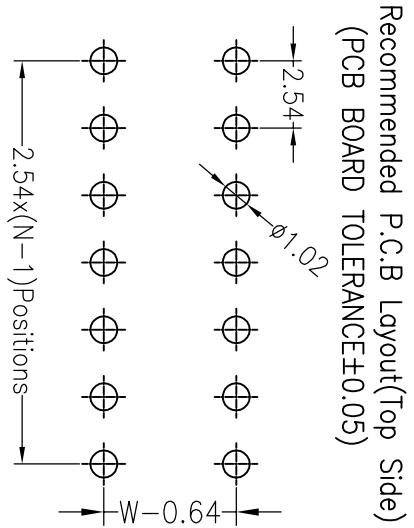

**SPECIFICATIONS**



Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C  
 Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

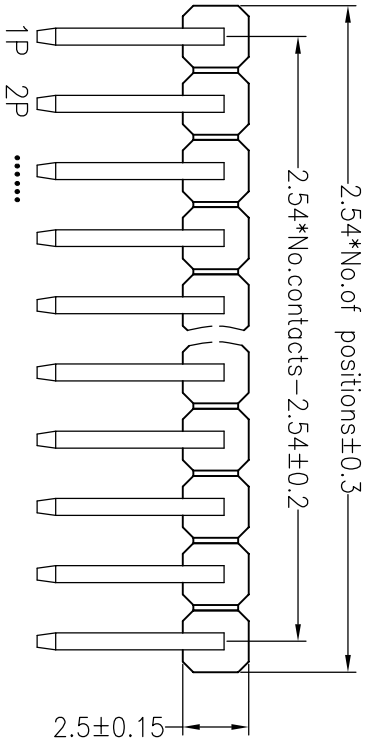

**Ordering Information**

1225 11XX X N XX U XXX X 02

- No. of Pins Per Row: 1x40
- Insulator Material Option: A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Contact Plating: G0:Gold Flash, G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length: SQ
- Packing: 0=PE Bag, A=Troy, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

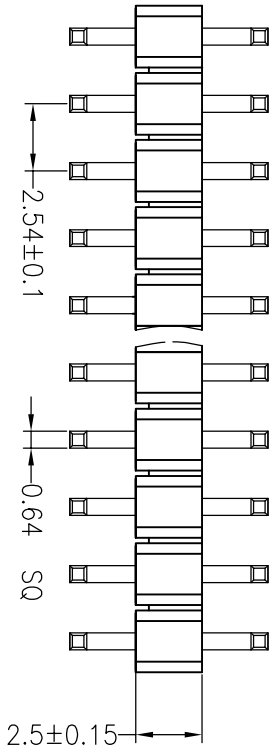

Dimension antitheses list

ITEM	PC	W	L
Alternate	6.00	6.58	19.80

注: 塑胶居中

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

OPERATION	±0.30	DRAW	YYuSheng	12.07.02	SCALE	FIT	PART NO. 122511XXXXXXUXXXX02	
	±0.20	CHECK			UNIT	mm	TITLE: 2.54mm Pin Header 2.5mm Single 两边弯	
	±0.10	APPROVE			SIZE	A4		
ANGLE	±3°				SHEET	1/1		
DIM	TOL				PROJ.			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE					
A0	2012.07.02	NEW DRAWING						
1								