




HSE ROHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
 Contact Plating:Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

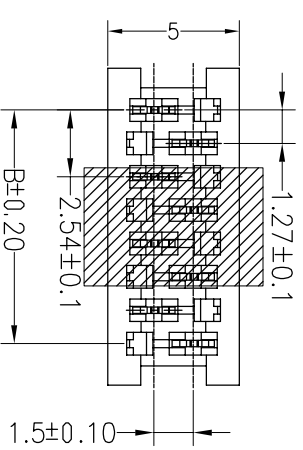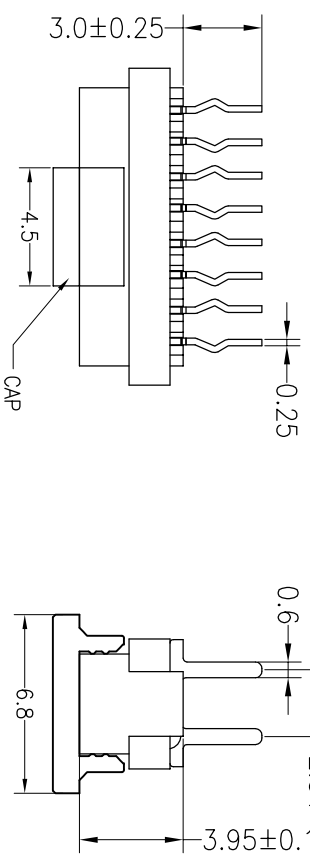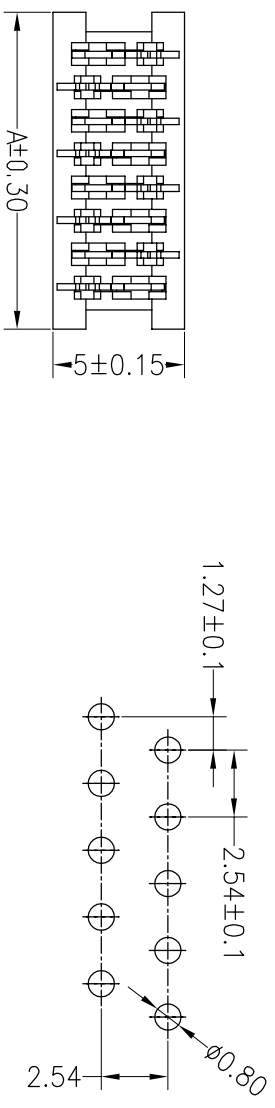

PINS	A	B
4	6.98	3.81
6	9.52	6.35
8	12.06	8.89
10	14.60	11.43
12	17.14	13.97
14	19.68	16.51
16	22.22	19.05
18	24.76	21.59
20	27.30	24.13
22	29.84	26.67
24	32.38	29.21
26	34.92	31.75

Ordering Information

4000 XX F S SN X N X 01

No. of Pins: 04~26P
 Contact Plating: 50:Gold Flash/Tin, SN:1Tin
 Insulator Material Option: A=BK-PBT, D=BK-PA46
 Packing: T=Tube, P=Tube+Cap, R=Reel+Cap

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	yiyusheng	19.04.11	SCALE	FIT	PART NO.	TITLE:
				UNIT	SIZE				SHEET	PROJ.		
A0	2019.04.11	NEW DRAWING		X.X	±0.30			mm	A4	1/1	4000XXFSSNXXN01	
1				Angle	±3°	CHECK						

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892