




UL&CSA GRADE:
 UL Style.....2678
 Rate Temperature.....-20°C to 105°C
 Rate Voltage.....Max 150V
 Flame Test.....VW-1

CSA Standard.....C22.2 NO.210.2
 Rate Temperature.....-20°C to 105°C
 Rate Voltage.....Max 150V
 Flame Test.....FT1.FT2

Physical Property:
 Stranded Conductor
 AWG Size.....30AWG
 Material of Insulation.....Polyvinyl Chloride(PVC)
 Insulation thickness average.....9 mil

Print: JILN TOP AWM 2678 SB E472355 VW-1 105°C 150V 30AWG

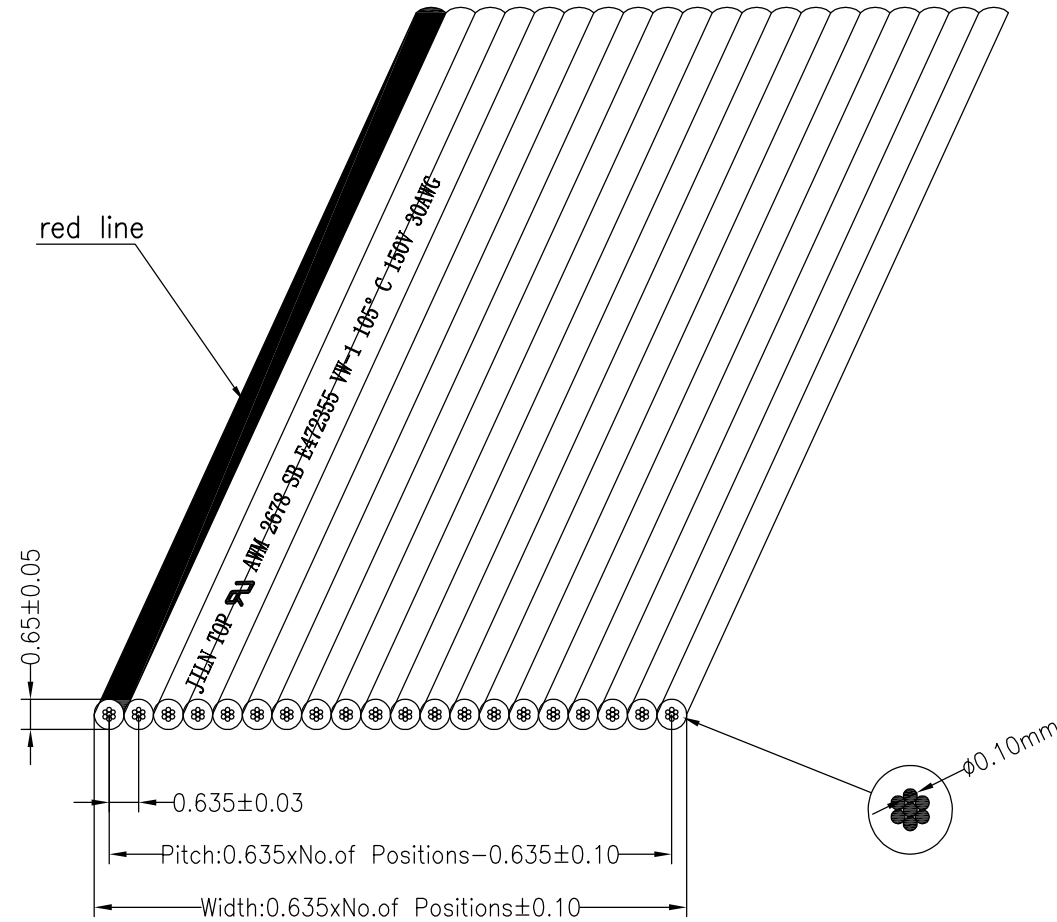

Ordering Information

G 2 3 2678 - 30 XX 0100 - 01

Pitch
3=0.635

No.of Pins
06P~100P

Length
0100=100m/Reel

OPERATION		DRAW	YiYuSheng	15.01.28
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.	G232678-30XX0100-01
TITLE:	0.635mm Flat Cable UL2678 30AWG

A0	2015.01.28	NEW DRAWING		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	